

PERFECT FLOORING



Flooring System

케미칼 플로링 시스템
PolyUrethane & Epoxy

Chemical Flooring System

- PERFECT PU FLOOR (PolyUrethane Flooring System)
- PERFECT E-COATING & E-LINING (Epoxy Flooring System)

● 용도

- 창고, 주차장, 병원, 학교, 주택 등
- 고하중을 받는 공장바닥
- 내약품성을 요구하는 공장바닥

● 특성

- 시공성과 작업성이 우수합니다.
- 탄성체로 저온특성이 우수하며 내마모성이 우수합니다.
- 내약품성이 우수합니다.
- 내충격성, 기계적 강도가 탁월하며, 오염성이 없습니다.

● 주의사항

- 중도 작업시 폭염(상온 30°C 이상)에서는 중도 작업을 피하여야 하나, 불가피한 경우에는 직사광선이 적은 오후 늦게 시공하여 주십시오.
(작업 적정 온도는 5~30°C입니다)
- 하지 내부에 수분이 존재할 때에는 완전히 건조시켜야 합니다.
- 습도가 높은날은 작업을 피해주십시오. (80% 이내 습도 추천)
- 시너 사용 시 최대 2% 이내 사용하십시오.
(PU, EPOXY 전용 시너 혼용 절대 금지)
- 2액형 제품은 기포가 들어가지 않도록 전동공구를 사용하여 충분히 골고루 혼합하여 주십시오.
- 직사광선을 피해 건조 한 곳에 보관하십시오
- 실내에 보관하십시오.

● Uses

- Warehouse, Parking, General office, Hospital, School, House, etc
- Factory floor requiring chemical resistance
- Factory floor subjected to heavy load


● Characteristic

- Good for construction and excellent workability
- Elastic material with good low - temperature characteristic and abrasion resistance
- Good chemical resistance
- Excellent impact resistance and mechanical strength without being contaminated

● Precautions

- Please stop work in hot weather. (more than 30 degrees)
But if no, please work late in the afternoon.
(Proper working temperature is 5~30 degrees)
- When moisture is present in the base, it should be completely dried.
- Avoid working on high humidity days.
(Recommended humidity within 80%)
- When using thinner, please use within 2% max
(Pu or EPOXY, Use only the dedicated thinner)
- Mix thoroughly with a power tool to prevent air bubbles from entering the 2part type products.
- Please avoid direct sunlight and store in a dry place.
- Please keep it inside.

1) Polyurethane Type Flooring

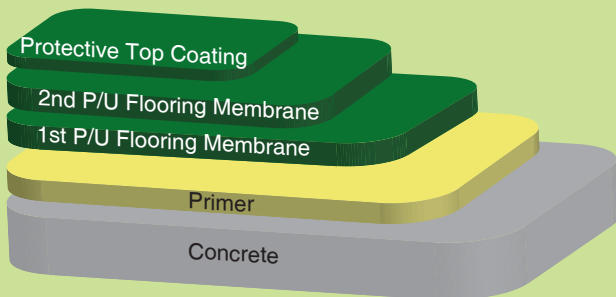


GHI



KOYANMAR

2) Epoxy type flooring

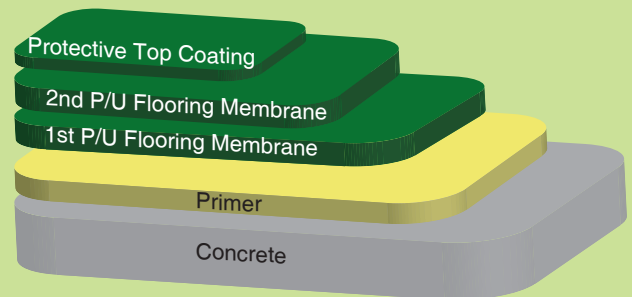

* For further information, please refer to Material Safety Data Sheet (MSDS).
* 기타 상세한 자료는 물질안전보건자료 (MSDS)를 참조하십시오.

Supplier in Myanmar



UNIVERSALBIRD TRADING CO., LTD.

Yangon Branch : Room No. 6C, Aye Yeik Thar Condominium, No. (483),
Aye Yeik Thar (2) Street, Bahan Tsp. Yangon, Myanmar

MP : 09-44476-7044 (Myanmar & English)

MP : 09-44476-7045 (Korean & English)

Sole Distributor by
GHI
GLOBAL HIGHTECH INDUSTRY

GHI CO., LTD. 16gil - 6 Jinjang Bukgu, Ulsan, Korea

Tel : 82-52-298-2259, Direct MP : 82-10-9300-2259

E-mail : steve@ghi.cc Myanmar MP : 09-42173-9844 (Korean)



Registered ISO 9001, 14001