

PERFECT KILL CPF - 903

곰팡이 결로방지 단열방수제

CONDENSATION & INSULATION WATERPROOFING

CHEMPROOF

Waterproofing System

● 특징

CPF - 903은 세라믹의 공기층과 스티렌아크릴의 공중합체 수지를 이용하여 경계면의 온도 차이를 극소화합니다. 도막내단열층은 차단막을 형성하여 열을 반사, 굴절, 분산시키는 효과가 뛰어나 우수한 항균성으로 곰팡이, 해충, 이끼 등을 방지하는 효과를 발휘합니다. 또한 수용성 제품으로 위생적이며 냄새도 적고 화재 위험도 없는 제품입니다.

● 용도

- APT / 빌라 등의 베란다 및 지하실 내부
- 일반주택 습기에 의한 곰팡이 발생부위
- 물류창고 내, 외벽
- 건축물 지하와 옥상 구조물의 단열
- 목조주택 및 기타 콘크리트 관련 구조물 및 판넬 공장 지붕의 단열

● 주의사항

- 5°C 이하에서는 사용을 금합니다.
- 희석제는 3% 미만으로 사용하십시오. (희석제의 과다사용은 불량도막이나 단열기능의 저하를 가져올 수 있습니다)
- 건조시간을 반드시 준수하십시오.
- 먹거나 마시지 않도록 하며, 어린이 손에 닿지 않도록 보관하십시오.
- 시공 시에는 주변 환경의 안전 상태를 확인하십시오.
- 사용 후 용기는 밀폐 보관하고 동결에 주의하십시오.
- 실내에 보관하십시오.

● 사용방법

1. 시공부위의 기름, 이끼, 유분, 오물찌꺼기 등을 깨끗이 청소합니다.
 - 청소 시 산성분이 있는 세척제는 사용하지 않도록 합니다.
 - 시공부위에 물기가 있을 경우 반드시 건조 후 시공합니다.
 - 균열이 발생한 부분은 V컷팅, U컷팅을 한 후 크랙 충전제를 이용하여 보수합니다.
2. 위의 준비사항이 완료되면 붓, 롤러를 이용하여 흘러내리지 않을 정도로 2 ~ 3회 도포합니다.
3. 에어리스를 사용할 경우 노즐구경은 0.019"~0.031" / 분사압력 350 atm 이상이어야 합니다.
4. 일반적인 시공부위는 별도의 프라이머를 사용하지 않으나 도장 면이 부실한 경우에는 프라이머를 이용하여 도포작업을 시행한 후 2의 순서로 작업을 시행합니다. (3회 도장 시 구조체에 최대의 효과를 발휘합니다)

● 포장단위 / 색상

- 4Liter, 18Liter Pail / 색상 : 백색



● Feature

CPF - 903 is minimizes the temperature difference at the interface by using the air layer of ceramic and the copolymer resin of styrene acrylic. The insulation layer in the film forms a barrier film and has the effect of reflecting, refracting and dispersing the heat, and it has the effect of preventing fungi, insects and moss by excellent antibacterial property. It is a hygienic, water-soluble product with less odor and no fire hazard.

● Uses

- APT / villa interior and basement interior
- General house - Mold caused by moisture
- The inner and outer walls of warehouse
- Insulation of building underground and roof structure
- Insulation of wooden houses and other concrete related structures
- Insulation of panel factory roof

● Precautions


- Do not use below 5°C.
- Use less than 3% of diluent (Excessive use of thinner may cause deterioration of bad coat or insulation)
- Be sure to observe the drying time.
- Avoid eating or drinking, and keep out of reach of children.
- Please check the safety condition of the surrounding environment when constructing.
- Keep containers tightly closed and be careful about freezing after use.
- Please keep it inside.

● How to use

1. Clean the oil, moss and dirt on the construction site thoroughly.
 - Do not use cleaning agents containing acidic substances during cleaning.
 - If there is water on the construction site, be sure to dry after construction.
 - After the V-cutting and U-cutting are performed, the cracks are repaired using a crack filling agent.
2. Use a brush or roller to apply 2 to 3 times to avoid falling down.
3. When using airless, the nozzle diameter should be 0.019"~0.031" / injection pressure 350 atm or more.
4. The coating surface is not good, apply the primer and then perform the work in the order for 2. (CPF - 903 has maximum effect on the structure during 3 times of painting)

● Packing Unit & Color

- 4Liter, 18Liter Pail / Color : White

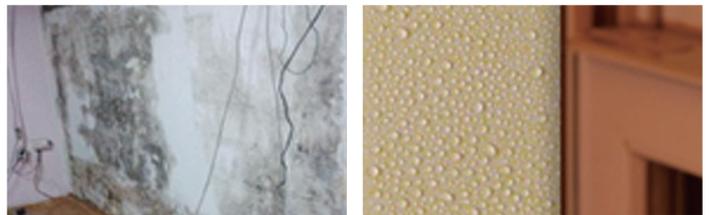

* For further information, please refer to Material Safety Data Sheet (MSDS).
* 기타 상세한 자료는 물질안전보건자료 (MSDS)를 참조하십시오.

Supplier in Myanmar



Yangon Branch : Room No. 6C, Aye Yeik Thar Condominum, No. (483) ,
Aye Yeik Thar (2) Street, Bahan Tsp. Yangon, Myanmar

MP : 09-44476-7044 (Myanmar & English)
MP : 09-44476-7045 (Korean & English)



16gil - 6 Jinjang Bukgu, Ulsan, Korea
Tel : 82-52-298-2259 , Direct MP : 82-10-9300-2259
E-mail : steve@ghi.cc Myanmar MP : 09-42173-9844 (Korean)



Registered ISO 9001 , 14001

PERFECT KILL CPF - 903

CHEMPROOF

곰팡이 결로방지 단열방수제

Waterproofing System

CONDENSATION & INSULATION WATERPROOFING

● Feature

CPF-903 ရေစားဆေးသည် antibacterial property ဝါဂင်သဖြင့် ရေငွေ့ပျံခြင်း ကြောင့်ဖြစ်ပေါ်လာသော မှို၊ ငှက်မွှား နှင့် ရေညိုပင်များ အန္တရာယ်မှ ကာကွယ်ပေးပါသည်။ အပူဒဏ်ခံနိုင်အောင် အထူးစီမံထားပြီး အနံ့မရှိသည့်အတွက် သုံးစွဲသူများ ကြိုက်နှစ်သက်သည့် ရေစားဆေး ဖြစ်ပါသည်။ CPF-903ကို ကျန်းမာရေးနှင့် ညီညွတ်စေရန် ရည်ရွယ်ထုတ်လုပ်ထားပြီး ၎င်းသည်ရေတွင်ပျော်ဝင်နိုင်ကာ ဆေးကြောင့် မီးဘေးအန္တရာယ် မဖြစ်စေနိုင်ပါ။

● Uses

- Apartment/ Villa များ၏ interior ၊ မြေအောက် basement interior အတွက် အသုံးပြုနိုင်ပါသည်။
- Moisture ကြောင့်ဖြစ်သည့် မှိုစွဲနေသောမည်သည့် အိမ်မဆိုအသုံးပြုနိုင်ပါသည်။
- Warehouse များ၏ အတွင်းအပြင်နံရံများ ။
- Building underground နှင့် roof များအပူဒဏ်ခံနိုင်စေရန်။
- သစ်ဖြင့်ဆောက်လုပ်ထားသောအိမ်များ၊ ကွန်ကရစ်ဖြင့်ဆောက်လုပ်ထားသော အိမ်များ အပူဒဏ်ခံနိုင်စေရန်။
- Factory panel roof (သွပ်မိုး) များ အပူဒဏ်ခံနိုင်စေရန် အသုံးပြုနိုင်ပါသည်။

● Precautions

- 5° C အပူချိန် အောက်တွင် အသုံးမပြုပါနှင့်။
- Thinner အသုံးပြု ဝါက 3% သာရောနှောပါ။ Thinner သည် insulation အတွက် မထိရောက်နိုင်ပါ။
- အခြောက်ခံရာတွင် သေချာစွာခြောက်အောင်စောင့်ကြည့်ပါ။
- ကလေးများနှင့်ဝေးရာတွင် ထားပါ။
- အသုံးပြုမည့် ပတ်ဝန်းကျင်နေရာ safety ဖြစ်/မဖြစ် စစ်ဆေးပါ။
- ပြန်သိမ်းသည့်အခါ အဖုံးအား လေလုံအောင်ပိတ်ပြီး သိမ်းပါ။
- အဆောက်အဦးအတွင်း၌သာသိမ်းဆည်းပါ။

● How to use

1. လုပ်ငန်းခွင်နေရာအား ဆီများ ၊ ဖုန်မှုန့် များ ၊ အမှိုက်သရိုက်များ မရှိအောင် သေသေချာချာသန့်ရှင်းပါ။ သန့်ရှင်းရာတွင် အက်ဆစ်ပင်သော cleaning agent များကို အသုံးမပြုရ။
2. လုပ်ငန်းခွင်နေရာတွင် ရေများရှိပါက ခြောက်သွေ့အောင်ပြုလုပ်ပါ။ အက်ကွကြောင်း အတွင်းမျက်နှာပြင် မညီသာမှုများအား (V-cutting, U-cutting) နည်းဖြင့် အချောသတ်ပြီးသည့်အခါ sealant ဖြင့် crack အားဦးစွာဖြည့်ပါ။
3. Brush or Roller ကိုအသုံးပြုပါ။
4. Spray အသုံးပြုလျှင် nozzle diameter သည် 0.019" နှင့် 0.031" ကြား ရှိသင့်သည်။ Injection pressure သည် 350 atm နှင့်အထက်ရှိရမည်။
5. မျက်နှာပြင်ညီသာမှုမရှိလျှင် ညီညာမှုရှိစေရန် sealant သုံး၍ ဦးစွာပြုပြင်ပါ။ ပြီးမှ Primer စသုံးပါ။ Primer သုံးပြီးလျှင် CPF-903 အား ၃ ထပ်အသုံးပြုပါ။

● Packing Unit & Color

- 4Liter, 18Liter Pail / Color : White

● Feature

CPF - 903 is minimizes the temperature difference at the interface by using the air layer of ceramic and the copolymer resin of styrene acrylic. The insulation layer in the film forms a barrier film and has the effect of reflecting, refracting and dispersing the heat, and it has the effect of preventing fungi, insects and moss by excellent antibacterial property. It is a hygienic, water-soluble product with less odor and no fire hazard.

● Uses

- APT / villa interior and basement interior
- General house - Mold caused by moisture
- The inner and outer walls of warehouse
- Insulation of building underground and roof structure
- Insulation of wooden houses and other concrete related structures
- Insulation of panel factory roof

● Precautions


- Do not use below 5°C.
- Use less than 3% of diluent (Excessive use of thinner may cause deterioration of bad coat or insulation)
- Be sure to observe the drying time.
- Avoid eating or drinking, and keep out of reach of children.
- Please check the safety condition of the surrounding environment when constructing.
- Keep containers tightly closed and be careful about freezing after use.
- Please keep it inside.

● How to use

1. Clean the oil, moss and dirt on the construction site thoroughly.
 - Do not use cleaning agents containing acidic substances during cleaning.
 - If there is water on the construction site, be sure to dry after construction.
 - After the V-cutting and U-cutting are performed, the cracks are repaired using a crack filling agent.
2. Use a brush or roller to apply 2 to 3 times to avoid falling down.
3. When using airless, the nozzle diameter should be 0.019"~0.031" / injection pressure 350 atm or more.
4. The coating surface is not good, apply the primer and then perform the work in the order for 2. (CPF - 903 has maximum effect on the structure during 3 times of painting)

● Packing Unit & Color

- 4Liter, 18Liter Pail / Color : White

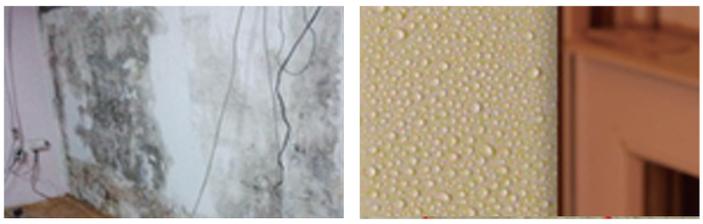

* For further information, please refer to Material Safety Data Sheet (MSDS).
* 기타 상세한 자료는 물질안전보건자료 (MSDS)를 참조하십시오.

<p>Supplier in Myanmar</p> 	<p>Yangon Branch : Room No. 6C, Aye Yeik Thar Condominium, No. (483) , Aye Yeik Thar (2) Street, Bahan Tsp. Yangon, Myanmar</p>	<p>MP : 09-44476-7044 (Myanmar & English) MP : 09-44476-7045 (Korean & English)</p>
<p>Sole Distributor by</p>  <p>GLOBAL HIGHTECH INDUSTRY</p>	<p>16gil - 6 Jinjang Bukgu, Ulsan, Korea Tel : 82-52-298-2259 , Direct MP : 82-10-9300-2259 E-mail : steve@ghi.cc Myanmar MP : 09-42173-9844 (Korean)</p>	 <p>Registered ISO 9001 , 14001</p>